

GBR-FB440 440W Waterproof Beam Moving Head Light



Specifications

- * Input Voltage: AC90-240V 50-60Hz
- * Lamp: 1X 440W 20R Osram Lamp
- * Control Signal: DMX 512, Master-slave and sound activated or Stand alone
- * Control Channel: 16/20 DMX Channels
- * Power Consumption: 700W
- * Product Size: 490x404x822mm
- * Packing Size: 620x620x830mm (Carton)
- * Net Weight: 41kgs
- * Gross Weight: 45.5kgs

Features

- * High Power Original 440W Osram or Yodn Lamp
- * 1500 Hours Lamp Life Span
- * 540° pan and 270° tilt movement
- * 16 bit smooth and precise resolution for PAN/TILT movement
- * Scan position memory, auto X/Y reposition Correction
- * 0-2.3° Beam Angle
- * Fixed color wheel with 14 fixed Colors + Open
- * Fixed Gobo wheel with 17 Gobos+Open
- * 8-Facet Prism with Speed Adjustable and variable direction.
- * Mechanical shutter and adjustable speed strobe effect
- * Linear Focus and Frost Filter
- * 16/20 Channels Can be optional
- * Control By 4 Modes: DMX 512, Master/Slave, Sound activity and work auto
- * 2.1 Inch LCD Display
- * IP55 Protection Rate
- * IP55 Power Cable IN
- * IP 55 DMX Cables IN/OUT
- * Apply for Outdoor Environment such as fountain shows, Theme park, Architectural Shows, Live Concerts, Bridge landscapes etc.

GBR-FB350 350W Waterproof Beam Moving Head Light



Specifications

- * Input Voltage: AC90-240V 50-60Hz
- * Lamp: 1X 350W 17R Phillips Lamp
- * Control Signal: DMX 512, Master-slave and sound activated or Stand alone
- * Control Channel: 16/20 DMX Channels
- * Power Consumption: 500W
- * Product Size: 490x404x722mm
- * Packing Size: 620x530x780mm (Carton)
- * Net Weight: 35kg
- * Gross Weight: 39kg

Features

- * High Power Original 350W R17 Philips Lamp
- * 1500 Hours Lamp Life Span
- * 540° pan and 270° tilt movement
- * 16 bit smooth and precise resolution for PAN/TILT movement
- * Scan position memory, auto X/Y reposition Correction
- * 0-2.3° Beam Angle
- * Fixed color wheel with 14 fixed Colors + Open
- * Fixed Gobo wheel with 17 Gobos + Open (新款 13 Static Gobos + 1 Animation Gobos + Open)
- * 8-Facet Prism with Speed Adjustable and variable direction.
- * Mechanical shutter and adjustable speed strobe effect
- * Linear Focus and Frost Filter
- * 16/20 Channels Can be optional
- * Control By 4 Modes: DMX 512, Master/Slave, Sound activity and work auto
- * 2.1 Inch LCD Display
- * IP55 Protection Rate
- * IP55 Power Cable IN
- * IP 55 DMX Cables IN/OUT
- * Apply for Outdoor Environment such as fountain shows, Theme park, Architectural Shows, Live Concerts, Bridge landscapes etc.

GBR-FG350/440 350W/440W Waterproof Spot Moving Head Light



Specifications

- * Input Voltage: AC90-240V 50-60Hz
- * Lamp: 1X 350W 17R Phillips Lamp/440W Osram lamp
- * Control Signal: DMX 512, Master-slave and sound activated or Stand alone
- * Control Channel: 21 DMX Channels
- * Power Consumption: 500W/700W
- * Product Size: 490x404x722mm
- * Packing Size: 620x530x780mm (Carton)
- * Net Weight: 36kgs
- * Gross Weight: 41.5kgs

Features

- * High Power Original 350W R17 Philips/Osram R20 Lamp
- * Spot Beam Wash 3in1 Moving head light
- * 1500 Hours Lamp Life Span
- * 540° pan and 270° tilt movement
- * 16 bit smooth and precise resolution for PAN/TILT movement
- * Scan position memory, auto X/Y reposition Correction
- * 0-45° Zoom Beam Angle
- * Fixed color wheel with 11 fixed Colors + Open
- * Fixed Gobo wheel with 17 Gobos + Open
- * Rotation Gobo wheel with 12 Rotation Gobo + Open
- * 16-Facet Prism with Speed Adjustable and variable direction.
- * Mechanical shutter and adjustable speed strobe effect
- * Linear Focus and Frost Filter
- * 21 Channels
- * Control By 4 Modes: DMX 512, Master/Slave, Sound activity and work auto
- * 2.0 Inch LCD Display
- * -45°C - 70°C Working Temperature
- * IP55 Protection Rate
- * IP55 Power Cable IN
- * IP 55 DMX Cables IN/OUT
- * Apply for Outdoor Environment such as fountain shows, Theme park, Architectural Shows, Live Concerts, Bridge landscapes etc.

GBR-FB371 371W Outdoor Beam Moving Head Light



Specifications

- *Input Voltage: AC90-240V 50-60Hz
- *Lamp: Osram Sirius 371W
- *Control Signal: DMX 512, Master-slave and sound activated or Stand alone
- *Control Channel: 16/20 MX Channels
- *Power Consumption:450W
- * Product Size: 440x400x690mm
- * Packing Size: 545x540x740mm
- *Net Weight: 28.70kgs
- * Gross Weight: 34.5kgs

Features

- * High Power Original Osram Sirius 461W Lamp
- * 1500 Hours Lamp Life Span
- * 540° pan and 270° tilt movement
- *16 bit smooth and precise resolution for PAN/TILT movement
- *Scan position memory, auto X/Y reposition Correction
- *Beam Angle from 0- 2°
- * Color Wheel with 14 colors + Open
- * Gobo wheel with 13 Fixed Gobos+Open
- * Prism: 8-Facet Circular Prism + 16-Facet Circular Prism with Speed Adjustable and variable direction.
- * 0-100% Linear Dimmer
- * Preset variable/random strobe
- * Linear Focus and Variable Frost Filter
- * 16/20 DMX Channels
- * Control By 4 Modes: DMX 512, Master/Slave, Sound activity and work auto
- * -25°C-50°C Working Temperature
- * IP 65 Waterproof
- * Apply for Outdoor Environment such as fountain shows, Theme park, Architectural Shows, Live Concerts, Bridge landscapes etc.

GBR-GB461 461W CMY Beam Spot Wash 3in1 Moving Head



Specifications

- *Input Voltage: AC90-240V 50-60Hz
- *Lamp: Osram Sirius 461W
- *Control Signal: DMX 512, Master-slave and sound activated or Stand alone
- *Control Channel: 26/30 DMX Channels
- *Power Consumption: 600W
- *Product Size: 400x295x690mm
- *Net Weight: 23.5kg

Features

- * High Power Original Osram Sirius 461W
- * 1500 Hours Lamp Life Span
- * 540° pan and 270° tilt movement
- * 16 bit smooth and precise resolution for PAN/TILT movement
- * Scan position memory, auto X/Y reposition Correction
- * 3-45° Leanr Zoom Beam Angle
- * CMY Color Mixing System
- * Color Wheel with 13 colors + open
- * 1 Slice with Rainbow color effect
- * Gobo wheel 1 with 14 Fixed Gobos+Open
- * Gobo wheel 2 with 7 Roation Gobos + Open
- * Gobo Wheel 3 with 3 Animation Gobos effect + Open
- * 8-Facet Circular Prism + 16-Facet Circular Prism with Speed Adjustable and variable direction.
- * Mechanical shutter and adjustable speed strobe effect
- * Electronic Linear Focus and Variable Frost Filter
- * 26/30 DMX Channels
- * Control By 4 Modes: DMX 512, Master/Slave, Sound activity and work auto
- * Device locking PAN and TILT mechanisms for transportation and maintenance
- * -35°C-55°C Working Temperature
- * Apply for Large Scale Live Concerts, TV Studios, Video Production, Road Show, Mobile DJ, Clubs, Disco, Bar etc.

GBR-GB350 350W Beam Spot Wash 3in1 Moving Head



Specifications

- *Input Voltage: AC90-240V 50-60Hz
- *Lamp:1X 350W R17 Yodn/Phillips Lamp
- *Control Signal: DMX 512, Master-slave and sound activated or Stand alone
- *Control Channel: 16/24 DMX Channels
- *Power Consumption:500W
- * Product Size: 410x300x622mm
- * Packing Size: 500x500x600mm (Carton)
- *Net Weight: 20.5kgs
- *Gross Weight: 24.2kgs

Features

- * High Power Original 350W R17 Yodn/Phillips Lamp
- * 2000 Hours Lamp Life Span
- * 540° pan and 270° tilt movement
- *16 bit smooth and precise resolution for PAN/TILT movement
- *Scan position memory, auto X/Y reposition Correction
- *0-40° Leanr Zoom Beam Angle
- * Color Wheel with 13 Colors+Open
- * Gobo wheel 1 with 14 Fixed Gobos+Open
- * Gobo wheel 2 with 9 Roation Gobos + Open
- *Prism 1 for 16-Facet with Speed Adjustable and variable direction.
- *Prism2 for 8-Facet with Speed Adjustable and variable direction.
- * Two Prisms can mix up for 24 facet prism.
- *Mechanical shutter and adjustable speed strobe effect
- *Linear Focus and Variable Frost Filter
- * 16/24 DMX Channels can be optional
- *Control By 4 Modes: DMX 512, Master/Salve, Sound activity and work auto
- * 2.8 Inch LCD Display
- * -45°C-70°C Working Temperature
- *Apply for Large Scale Live Concerts, TV Studios, Video Production, Road Show, Mobile DJ, Clubs, Disco, Bar etc.

GBR-GB280 280W Beam Spot Wash 3in1 Moving Head



Specifications

- *Input Voltage: AC90-240V 50-60Hz
- *Lamp: 280W R10 Yodn Lamp
- *Control Signal: DMX 512, Master-slave and sound activated or Stand alone
- *Control Channel: 16/24 DMX Channels
- *Power Consumption:450W
- * Product Size: 380x260x600mm
- * Packing Size: 460x470x700mm
- *Net Weight:18.5kgs
- *Gross Weight: 22.5kgs

Features

- * High Power Original 280W R10 Lamp
- * 2000 Hours Lamp Life Span
- *540° pan and 270° tilt movement
- *16 bit smooth and precise resolution for PAN/TILT movement
- *Scan position memory, auto X/Y reposition Correction
- * 0-25° Linear motorized Zoom
- * Color Wheel with 13 colors
- * Gobo wheel 1 with 17 Fixed Gobos+Open
- * Gobo wheel 2 with 9 Roation Gobos + Open
- * 2 Independent Prisms (Standard for Linear Prism & 16-facet prism , with speed adjustable and variable direction).
- *0-100% Linear Dimmer and adjustable speed strobe effect
- *Linear Focus and Variable Frost Filter
- * 16/24 DMX Channels can be optional
- *Control By 4 Modes: DMX 512, Master/Salve, Sound activity and work auto
- * Overheating protection Switch
- * 2.2 Inch LCD Display
- * -45°C-70°C Working Temperature
- *Apply for Live Concerts, TV Studios, Video Production, Road Show, Mobile DJ, Clubs, Disco, Bar etc.

GBR-B371 371W Super Brightness Beam Moving Head



Specifications

- *Input Voltage: AC90-240V 50-60Hz
- *Lamp: Osram Sirius 371W
- *Control Signal: DMX 512, Master-slave and sound activated or Stand alone
- *Control Channel: 16/20 MX Channels
- *Power Consumption: 550W
- * Product Size: 385x255x605mm
- * Packing Size: 480x380x720mm
- *Net Weight: 19.8kg
- *Gross Weight: 23kg

Features

- * High Power Original Osram Sirius 371W Lamp
- * 1500 Hours Lamp Life Span
- * 540° pan and 270° tilt movement
- *16 bit smooth and precise resolution for PAN/TILT movement
- *Scan position memory, auto X/Y reposition Correction
- *BeamAngle from 2°
- * Color Wheel with 14 colors + Open
- * Gobo wheel with 13 Fixed Gobos+Open
- * Prism: 8-Facet Circular Prism + 16-Facet Circular Prism with Speed Adjustable and variable direction.
- * 0-100% Linear Dimmer
- * Preset variable/random strobe
- * Linear Focus and Variable Frost Filter
- * 16/20 DMX Channels
- * Control By 4 Modes: DMX 512, Master/Slave, Sound activity and work auto
- * -25°C-50°C Working Temperature
- * Apply for Large Scale Live Concerts, TV Studios, Video Production, Road Show, Mobile DJ, Clubs, Disco, Bar etc.

GBR-B200/230 200W/230W Sharpy Beam Moving Head



Specifications

- *Input Voltage: AC90-240V 50-60Hz
- *Lamp:5R Phillips UHP Lamp or 7R osram Lamp
- *Control Signal: DMX 512, Master-slave and sound activated or Stand alone
- *Control Channel: 16/20 DMX Channels
- *Power Consumption:280W/300W
- * Product Size: 400x330x500mm
- * Packing Size: 470x440x555mm
- *Net Weight:16.5kgs
- *Gross Weight: 19.5kgs

Features

- * High Power 189W Phillips UHP Lamp or 230W Osram Lamp
- * 2000 Hours Lamp Life Span
- * 540° pan and 250° tilt movement
- *16 bit smooth and precise resolution for PAN/TILT movement
- *Scan position memory, auto X/Y reposition Correction
- *0-3.2° Beam Degree
- * Color Wheel with 14 fixed Colors+Open
- * Gobo wheel with 17 Fixed Gobos+Open
- * 16-Facet with Speed Adjustable and variable direction.
- *0-100% Linear Dimmer and adjustable speed strobe effect
- *Linear Focus and Variable Frost Filter
- * 16/20 DMX Channels can be optional
- *Control By 4 Modes: DMX 512, Master/Slave, Sound activity and work auto
- *Device locking PAN and TILT mechanisms for transportation and maintenance
- * -45°C-70°C Working Temperature
- *Apply for Live Concerts, TV Studios, Video Production, Road Show, Mobile DJ, Clubs, Disco, Bar etc.

GBR-B230A 230W Dual Prism Sharpy Beam Moving Head



Specifications

- *Input Voltage: AC90-240V 50-60Hz
- *Lamp:5R Phillips UHP Lamp or 7R osram Lamp
- *Control Signal: DMX 512, Master-slave and sound activated or Stand alone
- *Control Channel: 16 DMX Channels
- *Power Consumption: 300W
- * Product Size: 400x330x500mm
- * Packing Size: 470x440x555mm
- *Net Weight:16.5kgs
- *Gross Weight: 19.5kgs

Features

- * High Power 230W Osram Lamp
- * 2000 Hours Lamp Life Span
- * 540° pan and 250° tilt movement
- *16 bit smooth and precise resolution for PAN/TILT movement
- *Scan position memory, auto X/Y reposition Correction
- *0-3.2° Beam Degree
- * Color Wheel with 14 fixed Colors+Open
- * Gobo wheel with 17 Fixed Gobos+Open
- * 8-Facet Prism + 16-Facet Dual prisms ,with Speed Adjustable and variable direction.
- *0-100% Linear Dimmer and adjustable speed strobe effect
- *Linear Focus and Variable Frost Filter
- * 16 DMX Channels can be optional
- *Control By 4 Modes: DMX 512, Master/Slave, Sound activity and work auto
- *Device locking PAN and TILT mechanisms for transportation and maintenance
- * -45°C-70°C Working Temperature
- *Apply for Live Concerts, TV Studios, Video Production, Road Show, Mobile DJ, Clubs, Disco, Bar etc.

GBR-GL150 150W LED Spot Moving Head Light



Specifications

- *Input Voltage: AC90-240V 50-60Hz
- *Lamp:1x150W White LED Lamp
- *Control Signal: DMX 512, Master-slave and sound activated or Stand alone
- *Control Channel: 10/12/14/16 DMX Channels
- *Power Consumption: 250W
- * Product Size: 360x230x440mm
- * Package Size: 430x340x510mm
- *Net Weight:13kgs
- *Gross Weight: 15kgs

Features

- * 150W high Power White LED Lamp.
- * 50,000 Hours Life Span and Low Power Consumption
- * 540° pan and 270° tilt movement
- *16 bit smooth and precise resolution for PAN/TILT movement
- *Scan position memory, auto X/Y reposition Correction
- *15° Beam Degree
- * Color Wheel with 7 fixed Colors+Open
- * Gobo wheel 1 with 6 Rotation Gobos + Open (3 Metal Gobos and 4 Glass Gobos)
- * Gobo wheel 2 with 8 static Gobos + Open
- * 3-Facet prism,Speed Adjustable and variable direction.
- *0-100% Linear Dimmer and adjustable speed strobe effect
- * Electronic Linear Focus and Frost
- * 10/12/14/16 DMX Channels
- *Control By 4 Modes: DMX 512, Master/Slave, Sound activity and work auto
- * 3-Pin XLR connectors IN/OUT
- * Low noise fan cooling system
- * -25°C ~ 45°C max ambient temperature
- * IP20 protection rating

GBR-BL120 120W LED Beam Moving Head Light



Specifications

- *Input Voltage: AC90-240V 50-60Hz
- *Lamp:1x120W White LED Lamp
- *Control Signal: DMX 512, Master-slave and sound activated or Stand alone
- *Control Channel: 16/20 DMX Channels
- *Power Consumption: 200W
- * Product Size: 295x225x470mm
- * Package Size: 320x380x570mm
- *Net Weight:11.0kg
- *Gross Weight: 13.5kg

Features

- * 1 high Power 120W White LED Lamp.
- * 50,000 Hours Life Span and Low Power Consumption
- * 540° pan and 270° tilt movement
- *16 bit smooth and precise resolution for PAN/TILT movement
- *Scan position memory, auto X/Y reposition Correction
- *0-3° Beam Degree
- * Color Wheel with 13 Colors+Open
- * 1 Slice Rainbow Color Film
- * Gobo wheel with 14 Fixed Gobos + Open
- *8-Facet Circular Prism + 16-Facet Circular Prism with Speed Adjustable and variable direction.
- *0-100% Linear Dimmer and adjustable speed strobe effect
- *Independent Linear Focus and Variable Frost Filter
- * 16/20 DMX Channels can be optional
- *Control By 4 Modes: DMX 512, Master/Slave, Sound activity and work auto
- * Dual Bracket for easy handling.
- * Low Noise fan cooling system
- * -30°C ~ 45°C max ambient temperature
- * IP20 protection rating

GBR-WL1240 12x40W RGBW 4in1 LED Pixel Zoom Moving Head Light



Specifications

- * Input Voltage: AC90-240V 50-60Hz
- *LED Qty: 12x40W RGBW 4-in-1 LED
- *Control Mode: DMX 512, Master/Slave, Sound Activated and Work Auto
- *Control Channel: 11/17/18/58 DMX Channels
- *Power Consumption: 600W
- *Dimensions: 380x270x480 mm
- * Packing List: 470x390x520mm
- *Net Weight: 14.5kgs
- *Gross Weight: :17.5kgs

Features

- *12x40W Quad RGBW High Power LED
- * 50,000 hours lifespan and low power consumption
- * Each LED can be controlled individual
- * Highly compact, light, ultra-fast and powerful.
- * 540°Pan and 270°Tilt movement
- * Smooth, fast and precise PAN/TILT movement
- *Scan position memory, auto reposition after unexpected movement
- * Zoom Angel from 4°- 40°
- * Strobe effect with 1-25 flashes per second
- * 0-100% smooth linear LED dimmer
- * 11/17/18/58 DMX Channels USITT DMX-512
- * DMX512 and sound activated controllable or auto operation
- * 3-pin XLR connectors IN/OUT
- * -35°C to 45°C ambient temperature
- * IP20 protection rating

GBR-WL740 7x40W RGBW 4in1 LED Zoom Moving Head Light



Specifications

- * Input Voltage: AC90-240V 50-60Hz
- *LED Qty: 7x40W RGBW 4-in-1 LED
- *Control Mode: DMX 512, Master/Slave, Sound Activated and Work Auto
- *Control Channel: 17 DMX Channels
- *Power Consumption: 300W
- *Dimensions: 300x230x420 mm
- * Packing List: 370x300x520mm
- *Net Weight: 9.5kgs
- *Gross Weight: 11.5kgs

Features

- *7x40W Quad RGBW LED
- * 50,000 hours lifespan and low power consumption
- * Highly compact, light, ultra-fast and powerful.
- * 540° Pan and 270° Tilt movement
- * Smooth, fast and precise PAN/TILT movement
- * Scan position memory, auto reposition after unexpected movement
- * Zoom Angle from 5° - 50°
- * Strobe effect with 1-25 flashes per second
- * 0-100% smooth linear LED dimmer
- * 17 DMX Channels USITT DMX-512
- * DMX512 and sound activated controllable or auto operation
- * 3-pin XLR connectors IN/OUT
- * -35°C to 45°C ambient temperature
- * IP20 protection rating

GBR-BE1941 19x15W LED B-EYE Zoom Moving Head



Specifications

- *Input Voltage: AC90-240V 50-60Hz
- *LED Qty: 19x15W RGBW 4-in-1 Osram LED
- *Control Mode: DMX 512, Master/Slave, Sound Activated and Work Auto
- *Control Channel: 21/23/35/78/96/97 DMX Channels
- *Power Consumption: 450W
- *Product size: 194x253x358mm
- *Packing Size: 480x35x510mm
- *Net Weight: 16 kgs
- *Gross Weight: 17.5kgs

Features

- *50,000 hours lifespan and low power consumption
- *Compact and unique honeycomb design
- *Each LED could be controlled individual
- *Wash, Beam, FX (Kaleido Effects) effect
- *Digital wash-beam framing effect
- *Beam edge softening control (in wash mode)
- *4-60° beam angle to suitable for small and big application.
- *Unique Design for front Lens Bi-directional Endless Rotation
- *540° Pan and 250° Tilt movement with fast speed
- *Smooth, fast and precise PAN/TILT movement
- *Scan position memory, auto reposition after unexpected movement
- *High speed strobe effect with 1-25 flashes per second
- *0-100% smooth linear LED dimmer
- *21/23/35/78/96/97 DMX Channels USITT DMX-512
- *DMX512 and sound activated controllable or auto operation
- *-35°C to 45°C ambient temperature
- *IP20 protection rating

GBR-BE741 7x15W LED Mini B-EYE Zoom Moving Head



Specifications

- *Input Voltage: AC90-240V 50-60Hz
- *LED Qty: 7x15W RGBW 4-in-1 Osram LED
- *Control Mode: DMX 512, Master/Slave, Sound Activated and Work Auto
- *Control Channel: 14/27 DMX Channels
- *Power Consumption: 120W
- *Product Size: 300x220x420mm
- *Packing Size: 370x290x480mm
- *Net Weight: 7.5kgs
- *Gross Weight: 9.0kg

Features

- *50,000 hours lifespan and low power consumption
- *Compact and unique honeycomb design
- *Each LED could be controlled individual
- *Wash, Beam, FX (Kaleido Effects) effect
- *4-60° beam angle to suitable for small and big application.
- *Unique Design for front Lens Bi-directional Endless Rotation
- *540° Pan and 210° Tilt movement with fast speed
- *Smooth, fast and precise PAN/TILT movement
- *Scan position memory, auto reposition after unexpected movement
- *High speed strobe effect with 1-25 flashes per second
- *0-100% smooth linear LED dimmer
- *14/27 DMX Channels USITT DMX-512
- *DMX512 and sound activated controllable or auto operation
- *-35°C to 45°C ambient temperature
- *IP20 protection rating

GBR-BL1941 19x15W LED Zoom Moving Head Light



Specifications

- *Input Voltage: AC90-240V 50-60Hz
- *LED Qty: 19x15W RGBW 4-in-1 LED
- *Control Mode: DMX 512, Master/Slave, Sound Activated and Work Auto
- *Control Channel: 37/21/15/10/11 DMX Channels
- *Power Consumption: 250W
- *Dimensions: 310x210x400 mm
- *Packing Size: 400x320x460mm
- *Net Weight: 8.0 kg
- *Gross Weight: 9.5 kg

Features

- *50,000 hours lifespan and low power consumption
- *540° Pan and 270° Tilt movement with fast speed
- *Arranged in 3 concentric rings
- *Each Ring can be controlled individual
- *15-50° Zoom Beam Angle
- *Smooth, fast and precise PAN/TILT movement
- *Scan position memory, auto reposition after unexpected movement
- *LED Shutter, LED Dimming, LED rainbow Effect, Macro Effect.
- *Amazing visual effect by pro control
- *Default pixel macros effect for easy performance
- *37/21/15/10/11 DMX Channels USITT DMX-512
- *DMX512 and sound activated controllable or auto operation
- *3-Pin XLR connectors IN/OUT
- *-35°C to 45°C ambient temperature
- *IP20 protection rating
- *Apply for stage show, theater, TV Television, Wedding show, Party, Music Event, Mobile Disco, Road Show, Clubs etc.

GBR-WL3641 36x10W LED Wash Moving Head Light



Specifications

- *Input Voltage: AC90-240V 50-60Hz
- *LED Qty: 36x10W RGBW 4-in1 LED
- *Control Mode: DMX 512, Master/Slave, Sound Activated and Work Auto
- *Control Channel: 17 DMX Channels
- *Power Consumption: 400W
- *Dimensions: 380x360x250 mm
- *Packing Size: 450x320x400mm
- *Net Weight: 9.0kgs
- *Gross Weight: 10.5kgs

Features

- * 36PCS 10W high power Quad Color LEDs
- * Specific optic system with Perfect color mixing
- * 50,000 hours lifespan and low power consumption
- * Smooth and precise resolution for PAN/TILT movement
- * 540° pan and 265° tilt movement
- * Zoom Angle from degree 10 to Degree 60
- * Scan position memory, auto reposition after unexpected movement
- * RGBW color mixing system
- * LED shutter/LED dimming/LED rainbow effect
- * Macros effect
- * Strobe effect with 18 flashes per second and pulse effect
- * General dimming and blackout for all four colors
- * Blue background LCD display
- * DMX512 and sound activated controllable or auto operation
- * 3-Pin XLR connectors IN/OUT
- * -35°C to 45°C ambient temperature
- * IP20 protection rating

GBR-BL741A 7x15W RGBW LED Pixel Beam Bar light



Specifications

- *Input Voltage: AC90-240V 50-60Hz
- *LED Qty: 7x15W RGBW 4-in-1 LED
- *Control Mode: DMX 512, Master/Slave, Sound Activated and Work Auto
- *Control Channel: 12/15/39 DMX Channels
- *Power Consumption: 120W
- *Dimension: 580x250x170mm
- *Packing Size: 640x320x250mm
- *Net Weight: 10KG
- *Gross Weight: 11 KG

Features

- *7x15W Power Lamp with Specific optic system and Excellent Beam effect
- *50,000 hours lifespan and low power consumption
- *New Advanced collimator Lens
- *Fast and precised 16-Bit Continuous 360° Pan Rotation, 270° Tilt rotation
- *7 pixels (each LED is a pixel), controllable individually
- *Laser-like homogenized 4° Color Changing Beams.
- *High efficiency LED shutter
- *Strobe effect with 25 flashes per second and pulse effect
- *0-100% smooth linear dimmer
- *Default programs for easy performance
- *Efficient Noise free aluminum cooling system with fan
- *3 DMX control modes, easy operate and install;
- *DMX512, master-slave and sound activated controllable or auto operation
- *LED display, Power IN/OUT as default, 3-pin XLR connectors
- *Great for club, stage, disco, bar and other DJ entertainment etc.

GBR-COB100 100W COB LED Par Light



Specifications

- *Input Voltage: AC90-240V 50-60Hz
- *LED Qty: 100W COB 2in1LED (Warm White & Cold White)
- *Control Mode: DMX 512, Master/Slave, Sound Activated and Work Auto
- *Control Channel: 4/8 DMX Channels
- *Power Consumption: 120W
- *Product Size: 305x220x325 mm
- *Packing Size: 540x540x400mm (4pcs/CTN)
- *Net Weight: 2.5 kgs
- *Gross Weight: 14.0kgs

Features

- *1*100W COB LEDs
- *50,000 hours life span and low power consumption
- * CTO3200K-6500K
- *60° Specific optic reflector
- *High light output with pure and even coverage
- *0-100% smooth linear LED dimmer
- *High speed strobe effect with speed adjustable
- *Static colors, color changing, built-in programs (multi colors only)
- *DMX 512, master-slave and sound activated controllable or auto operation
- *LED display
- *-20°C ~ 45°C max ambient temperature
- *Dual mounting brackets for installation*
- *IP20 Protection Rating

GBR-COB200 2x100W COB LED Blinder Light



Specifications

- *Input Voltage: AC90-240V 50-60Hz
- *LED Qty: 2x100W COB 2in1LED (Warm White & Cold White)
- *Control Mode: DMX 512, Master/Slave, Sound Activated and Work Auto
- *Control Channel: 4/8 DMX Channels
- *Power Consumption: 250W
- *Product Size: 400x155x250mm
- *Packing Size: 46x44x47 (4pcs/CTN)
- *Net Weight: 2.9kgs
- *Gross Weight: 14.00kgs

Features

- *2x100W COB LEDs (Warm White or Cold White can be Optional)
- * Each LED Can be individual Controlled
- *50,000 hours life span and low power consumption
- *High light output with pure and even coverage
- *0-100% smooth linear LED dimmer
- *High speed strobe effect with speed adjustable
- *Different Built-in programs and macro effects.
- *DMX 512, master-slave and sound activated controllable or auto operation
- *LED display
- *-20°C ~ 45°C max ambient temperature
- *IP20 Protection rating
- * Suitable for theatres, conference rooms, special photography, TV studios, exhibition centres, universities and schools, clubs, etc.

GBR-COB400 4*100W COB LED Blinder Light



Specifications

- *Input Voltage: AC90-240V 50-60Hz
- *LED Qty: 4X100W COB 2in1LED (Warm White & Cold White)
- *Control Mode: DMX 512, Master/Slave, Sound Activated and Work Auto
- *Control Channel: 4/8 DMX Channels
- *Power Consumption: 450W
- *Product Size: 360x350x180mm
- *Packing Size: 550x430x200mm
- *Net Weight: 7.8kgs
- *Gross Weight: 9.0kgs

Features

- *4*100W COB LEDs (Warm White or Cold White can be Optional)
- * Each LED Can be individual Controlled
- *50,000 hours life span and low power consumption
- *High light output with pure and even coverage
- *0-100% smooth linear LED dimmer
- *High speed strobe effect with speed adjustable
- *Different Built-in programs and macro effects.
- *DMX 512, master-slave and sound activated controllable or auto operation
- *LED display
- *-20°C ~ 45°C max ambient temperature
- *IP20 Protection rating
- * Suitable for theatres, conference rooms, special photography, TV studios, exhibition centres, universities and schools, clubs, etc.

GBR-CL400 4x100W COB LED Blinder Light




Specifications

- *Input Voltage: AC90-240V 50-60Hz
- *LED Qty: 4x100W COB 2in1LED (Warm White & Cold White)
- *Control Mode: DMX 512, Master/Slave, Sound Activated and Work Auto
- *Control Channel: 2/4/6/8/12 DMX Channels
- *Power Consumption: 450W
- *Product Dimensions: 380x370x190mm
- *Packing Size: 450x320x430mm
- *Net Weight: 11.0kg
- *Gross Weight: 12.5kg

Features

- * Reproduces the look and feel of the classic halogen audience blinder
- * Variety of dimming curves to accurately evoke the look and feel of this classic effect
- * Individual heads swivel independently in 25° Range
- * 4x100W COB LEDs (Warm White or Cold White can be Optional)
- * Each LED Can be individual Controlled
- * 50,000 hours life span and low power consumption
- * High light output with pure and even coverage
- * 0-100% smooth linear LED dimmer
- * High speed strobe effect with speed adjustable
- * Different Built-in programs and macro effects.
- * DMX 512, master-slave and sound activated controllable or auto operation
- * LCD display
- * -20°C ~ 45°C max ambient temperature
- * IP65 Protection rating
- * Suitable for theatres, conference rooms, special photography, TV studios, exhibition centres, universities and schools, clubs, etc.

GBR-PM3603 6x6 2in1 Pixel Mapping LED Matrix Panel

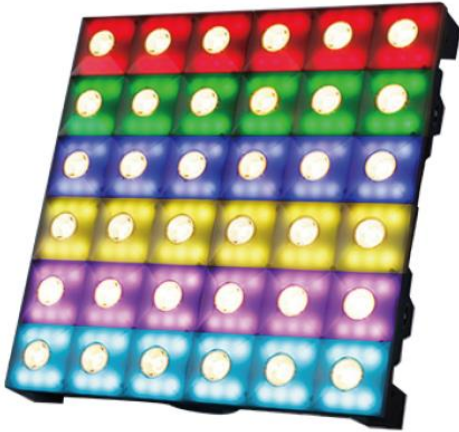

Specifications

- *Input Voltage: AC90-240V 50-60Hz
- *LED Qty: 36x3W Warm White /White Color LED + 216pcs RGB 3in1 SMD LED
- *Control Mode: DMX 512, Master/Slave, Sound Activated and Work Auto
- *Control Channel: 16/144 DMX Channels
- *Power Consumption: 200W
- *Dimensions: 500x500x80mm
- *Packing Size: 590x590x170mm
- *Net Weight: 5.5 kgs
- *Gross Weight: 6.8 kgs

Features

- * 36x3W Warm White LEDs + 216pcs SMD RGB LEDs
- * 50,000 hours lifespan and low power consumption
- * 36 LEDs Individual Pixel control of Beams + 216 pcs RGB Background Pixels
- * Super-sharp 6° warm white Beams
- * Incredible built-in programs for intense light shows
- * Excellent RGB color consistency while dimming to 0%
- * Completely silent, natural convection cooling system
- * High speed strobe effect with 1-25 flashes per second
- * 0-100% smooth linear LED dimmer
- * Amazing visual effect by pro control
- * Default pixel macros effect for easy performance
- * Options for numbers, letters, graphic effects or images
- * 6/9/144/149 DMX Channels USITT DMX-512
- * DMX512 and sound activated controllable or auto operation
- * Multifunctional bracket for floor or truss mounting
- * 3-pin XLR connectors IN/OUT
- * -35°C to 45°C ambient temperature
- * IP20 protection rating
- * Apply for Party, Club, bar, stage show, lighting event show etc.
- *

GBR-PB1203 12x3W Hybrid 2in1 LED Pixel Bar Light



Specifications

- *Input Voltage: AC90-240V 50-60Hz
- *LED Qty: 12x3W Warm White /White Color LED +72pcs RGB 3in1 SMD LED
- *Control Mode: DMX 512, Master/Slave, Sound Activated and Work Auto
- *Control Channel: 6/9/84/89 DMX Channels
- *Power Consumption: 80W
- *Dimensions: 960x850x145 mm
- *Packing Size: 980x135x195mm
- *Net Weight: 4.5 kgs
- *Gross Weight: 5.2 kgs

Features

- * 12x3W WW LE WW LEDs + 72x5050 SMD RGB LEDs
- * 50,000 hours lifespan and low power consumption
- * 12 LEDs Individual Pixel control of Beams + 72pcs RGB Background Pixels
- * Super-sharp 6° warm white Beams
- * Incredible built-in programs for intense light shows
- * Excellent RGB color consistency while dimming to 0%
- * Completely silent, natural convection cooling system
- * High speed strobe effect with 1-25 flashes per second
- * 0-100% smooth linear LED dimmer
- * 6/9/84/89 DMX Channels USITT DMX-512
- * DMX512 and sound activated controllable or auto operation
- * Multifunctional bracket for floor or truss mounting
- * 3-pin XLR connectors IN/OUT
- * -35°C to 45°C ambient temperature
- * IP20 protection rating
- * Apply for Party, Club, bar, stage show, lighting event show etc.
- *

GBR-LS1320IP 1320 RGBW 4in1 SMD LED Strobe Light



Specifications

- *Input Voltage: AC90-240V 50-60Hz
- *LED Qty: 1320pcs X0.8W RGBW Quad 5050 SMD LED
- *Control Mode: DMX 512, Master/Slave, Sound Activated and Work Auto
- *Control Channel: 4 / 5 / 7 / 13 / 15 / 31 DMX Channels
- *Power Consumption: 1200W
- *Product Dimensions: 495x200x265mm
- *Packing Size: 570x260x420mm
- *Net Weight: 13.00kgs
- *Gross Weight: 15.00kgs

Features

- * All the power of classic 3KW Xenon Strobes but with a slimmer profile and new features
- * flicker-free output, silent operation
- * Stunning selection of pre-programmed macros
- * Special Aluminum structural design that delivers superior cooling system
- * 1320 x 0.8w RGBW 4in1 5050 SMD LED
- * 12 individually controllable modules for chasing and other dynamic effects
- * Can use as blinder, flood light, wash light and strobe Light
- * 50,000 hours life span and low power consumption
- * Color Temperature from 6500K to 7500K
- * 120° Beam Angle
- * 0-100% smooth linear LED dimmer
- * High speed strobe effect with flashing rate reaches 0-30 times per second
- * Thermostat Sensor controlled variable speed fan for the cooling system
- * Temperature sensor help protect LED to be used longer
- * DMX 512, master-slave and sound activated controllable or auto operation
- * LCD display, IP rated locking power and 3-pin DMX connections
- * -20°C ~ 45°C max ambient temperature
- * IP65 Protection rating

GBR-TL1441 14x10W LED Wall Wash Light



Specifications

- *Input Voltage: AC90-240V 50-60Hz
- *LED Qty:14x10W RGBW 4in1 LED
- *Control Mode: DMX 512,Master/Slave, Sound Activated and Work Auto
- * Control Channel:9/23/56/65 DMX Channels
- * Power Consumption: 180W
- *Dimensions:1020x150x170 mm
- Packing Size: 1110x170x220mm
- *Net Weight: 7.2kgs
- *Gross Weight::8.0kgs

Features

- * 14 piece 12W higher Power RGBW 4in1 LED
- * 50,000 hours lifespan and low power consumption
- * Each LED could be controlled individual
- * Smooth RGBW Color Mixing (fast or slow color change operation)
- * Built-in programs DMX 512 Protocol
- * High speed strobe effect with 1-25 flashes per second
- * 0-100% smooth linear LED dimmer
- * 9/23/56/65 DMX Channels USITT DMX-512
- * DMX512 and sound activated controllable or auto operation
- * Pro Mounting Bracket available to hang on truss or set on the floor
- * Linkable via 3-pin XLR cables
- * -35°C to 45°C ambient temperature
- * IP65 protection rating

GBR-TL2403 24x3W LED Wall Washer Light



Specifications

- * Input Voltage: AC90-240V 50-60Hz
- * LED Qty: 24x3W RGB LED (R8/G8/B8) or 24x3w RGB 3in1 LED
- * Control Mode: DMX 512, Master/Slave, Sound and Work Auto
- * Control Channel: 7 DMX Channels
- * Power Consumption: 80W
- * Dimensions: 1000x80x125mm
- * Packing Size: 1070x140x170mm
- * Net Weight: 3.5 kgs
- * Gross Weight: 4.0kgs

Features

- * 24pcs 3W RGB LED (R8/G8/B8)/ 24x3w RGB 3in1 LED
- * 50,000 hours lifespan and low power consumption
- * 16.7 millions of colors by mixing
- * 25° Beam Angle (45° /60° can be Optional)
- * Manual Controllable for TILT angle adjustment.
- * LED shutter effect
- * Smooth LED dimming
- * LED rainbow effect
- * Macro effect
- * High speed strobe effect with speed adjustable
- * Different Built-in programs and macro effects.
- * 7 DMX Channels USITT DMX-512
- * DMX512 and sound activated controllable or auto operation
- * Pro Mounting Bracket available to hang on truss or set on the floor
- * Linkable via 3-pin XLR cables
- * -35°C to 45°C ambient temperature
- * IP65 protection rating

GBR-TL1861 18x15W RGBWA+UV 6in1 LED Par Can



Specifications

- * Input Voltage: AC90-240V 50-60Hz
- * LED Qty: 18x15W RGBWA+UV 6in1 LED
- * Control Mode: DMX 512, Master/Slave, Sound and Work Auto
- * Control Channel: 10 DMX Channels
- * Power Consumption: 300W
- * Product Size: 320x250x270mm
- * Packing Size: 560x550x360mm (4PC/CTN)
- * Net Weight: 5.5 kgs
- * Gross Weight: 6.2kgs

Features

- * 15W RGBWA+UV 6in1 LED (
- * 50,000 hours lifespan and low power consumption
- * 16.7 millions of colors by mixing
- * 25° Projection Beam Angle (15° /45° /60° can be Optional)
- * Manual Controllable for TILT angle adjustment.
- * 0-100% Smooth Dimmer
- * High speed strobe effect with speed adjustable
- * Different Built-in programs and macro effects.
- * 10 DMX Channels USITT DMX-512
- * DMX512 and sound activated controllable or auto operation
- * Dual mounting brackets for ground or hanging application
- * Linkable via 3-pin XLR cables
- * -35°C to 45°C ambient temperature
- * IP64 protection rating
- * Apply for large scale concerts, TV studio, Party, Club,, Wedding show, architectural lighting, etc.

GBR-TL1261 12x15W RGBWA+UV 6in1 LED Par Light



Specifications

- * Input Voltage: AC90-240V 50-60Hz
- * LED Qty: 12x15W RGBWA+UV 6in1 LED
- * Control Mode: DMX 512, Master/Slave, Sound and Work Auto
- * Control Channel: 10 DMX Channels
- * Power Consumption: 200W
- * Product Size: 320x250x270mm
- * Packing Size: 560x550x360mm (4PC/CTN)
- * Net Weight: 5.0 kgs
- * Gross Weight: 5.8kgs

Features

- * 15W RGBWA+UV 6in1 LED
- * 50,000 hours lifespan and low power consumption
- * 16.7 millions of colors by mixing
- * 25° Projection Beam Angle (15° /45° /60° can be Optional)
- * Manual Controllable for TILT angle adjustment.
- * 0-100% Smooth Dimmer
- * High speed strobe effect with speed adjustable
- * Different Built-in programs and macro effects.
- * 10 DMX Channels USITT DMX-512
- * DMX512 and sound activated controllable or auto operation
- * Dual mounting brackets for ground or hanging application
- * Linkable via 3-pin XLR cables
- * -35°C to 45°C ambient temperature
- * IP64 protection rating
- * Apply for large scale concerts, TV studio, Party, Club,, Wedding show, architectural lighting, etc.

GBR-TL1851 18x12W RGBWA 5in1 LED Waterproof Par Can



Specifications

- * Input Voltage: AC90-240V 50-60Hz
- * LED Qty: 18x12W RGBWA 5in1 LED
- * Control Mode: DMX 512, Master/Slave, Sound and Work Auto
- * Control Channel: 9 DMX Channels
- * Power Consumption: 250W
- * Product Size: 330x230x280mm
- * Packing Size: 620x620x400mm (4PC/CTN)
- * Net Weight: 5.0kgs
- * Gross Weight: 29.6kgs

Features

- * 12W RGBWA 5in1 LED
- * 50,000 hours lifespan and low power consumption
- * 16.7 millions of colors by mixing
- * 25° Projection Beam Angle (15° /45° /60° can be Optional)
- * Manual Controllable for TILT angle adjustment.
- * 0-100% Smooth Dimmer
- * High speed strobe effect with speed adjustable
- * Different Built-in programs and macro effects.
- * 9 DMX Channels USITT DMX-512
- * DMX512 and sound activated controllable or auto operation
- * Aluminum die-casting structure design with optimum cooling system
- * Dual mounting brackets for ground or hanging application
- * Linkable via 3-pin XLR cables
- * -35°C to 45°C ambient temperature
- * IP64 protection rating
- * Apply for large scale concerts, TV studio, Party, Club, Wedding show, architectural lighting, etc.

GBR-TL1841 18x10W RGBW 4in1 LED Waterproof Par Can



Specifications

- * Input Voltage: AC90-240V 50-60Hz
- * LED Qty: 18x10W RGBW 4in1 LED
- * Control Mode: DMX 512, Master/Slave, Sound and Work Auto
- * Control Channel: 8 DMX Channels
- * Power Consumption: 200W
- * Product Size: 330x230x280mm
- * Packing Size: 620x620x400mm (4PC/CTN)
- * Net Weight: 5.0kgs
- * Gross Weight: 29.6kgs

Features

- * 10W High Power RGBW 4in1 LED
- * 50,000 hours lifespan and low power consumption
- * 16.7 millions of colors by mixing
- * 45° Projection Beam Angle (25° /60° can be Optional)
- * Manual Controllable for TILT angle adjustment.
- * 0-100% Smooth Dimmer
- * High speed strobe effect with speed adjustable
- * Different Built-in programs and macro effects.
- * 8 DMX Channels USITT DMX-512
- * DMX512 and sound activated controllable or auto operation
- * Aluminum die-casting structure design with optimum cooling system
- * Dual mounting brackets for ground or hanging application
- * Linkable via 3-pin XLR cables
- * -35°C to 45°C ambient temperature
- * IP64 protection rating
- * Apply for large scale concerts, TV studio, Party, Club, Wedding show, architectural lighting, etc.

GBR-TL5403 54x3W Waterproof LED par



Specifications

- * Input Voltage: AC90-240V 50-60Hz
- * LED Qty: 54x3W RGBW LED (R14/G14/B14/W12)
- * Control Mode: DMX 512, Master/Slave, Sound and Work Auto
- * Control Channel: 6 DMX Channels
- * Power Consumption: 180W
- * Product Size: 330x230x280mm
- * Packing Size: 620x620x400mm (4PC/CTN)
- * Net Weight: 5.0kgs
- * Gross Weight: 29.6kgs

Features

- * 50,000 hours lifespan and low power consumption
- * 16.7 millions of colors by mixing
- * 25° Projection Beam Angle (45° /60° can be Optional)
- * Manual Controllable for TILT angle adjustment.
- * 0-100% Smooth Dimmer
- * High speed strobe effect with speed adjustable
- * Different Built-in programs and macro effects.
- * 6 DMX Channels USITT DMX-512
- * DMX512 and sound activated controllable or auto operation
- * Aluminum die-casting structure design with optimum cooling system
- * Dual mounting brackets for ground or hanging application
- * Linkable via 3-pin XLR cables
- * -35°C to 45°C ambient temperature
- * IP65 protection rating
- * Apply for large scale concerts, TV studio, Party, Club, Wedding show, architectural lighting, etc.

GBR-TL3603 36x3W Waterproof LED par



Specifications

- * Input Voltage: AC90-240V 50-60Hz
- * LED Qty: 36x3W RGB LED
- * Control Mode: DMX 512, Master/Slave, Sound and Work Auto
- * Control Channel: 6 DMX Channels
- * Power Consumption: 120W
- * Dimension: 260x200x255mm
- * Packing Size: 560x540x360mm (4pcs/CTN)
- * Net Weight: 4.5kg
- * Gross Weight: 5.5kg

Features

- * 50,000 hours lifespan and low power consumption
- * 16.7 millions of colors by mixing
- * 25° Projection Beam Angle (35° / 45° can be Optional)
- * Manual Controllable for TILT angle adjustment.
- * 0-100% Smooth Dimmer
- * High speed strobe effect with speed adjustable
- * Different Built-in programs and macro effects.
- * 6 DMX Channels USITT DMX-512
- * DMX512 and sound activated controllable or auto operation
- * Aluminum die-casting structure design with optimum cooling system
- * Dual mounting brackets for ground or hanging application
- * Linkable via 3-pin XLR cables
- * -35°C to 45°C ambient temperature
- * IP65 protection rating
- * Apply for large scale concerts, TV studio, Party, Club, Wedding show, architectural lighting, etc.

GBR-PL1861 18x15W RGBWA+UV 6in1 LED Par



Specifications

- * Input Voltage: AC90-240V 50-60Hz
- * LED Qty: 18x15W RGBWA+UV 6in1 LED
- * Control Mode: DMX 512, Master/Slave, Sound and Work Auto
- * Control Channel: 6/10 DMX Channels
- * Power Consumption: 300W
- * Dimension: 290x220x300mm
- * Packing Size: 540x540x400mm (4pcs/CTN)
- * Net Weight: 2.8kgs
- * Gross Weight: 15.2kgs

Features

- * 50,000 hours lifespan and low power consumption
- * 16.7 millions of colors by mixing
- * 25° Projection Beam Angle (35° /45° can be Optional)
- * Manual Controllable for TILT angle adjustment.
- * 0-100% Smooth Dimmer
- * High speed strobe effect with speed adjustable
- * Different Built-in programs and macro effects.
- * 6/10 DMX Channels USITT DMX-512
- * DMX512 and sound activated controllable or auto operation
- * Dual mounting brackets for ground or hanging application
- * Linkable via 3-pin XLR cables
- * -35°C to 45°C ambient temperature
- * IP20 protection rating

GBR-PL8403 84x3W LED Par Light



Specifications

- * Input Voltage: AC90-240V 50-60Hz
- * LED Qty: 84x3W RGBW LED (R21/G21/B21/W21)
- * Control Mode: DMX 512, Master/Slave, Sound and Work Auto
- * Control Channel: 6 DMX Channels
- * Power Consumption: 280W
- * Packing Size: 690x350x450mm (2pcs/CTN)
- * Net Weight: 5.8kgs
- * Gross Weight: 6.5kgs

Features

- * 50,000 hours lifespan and low power consumption
- * 16.7 millions of colors by mixing
- * 25° Projection Beam Angle (35° / 45° can be Optional)
- * Manual Controllable for TILT angle adjustment.
- * 0-100% Smooth Dimmer
- * High speed strobe effect with speed adjustable
- * Different Built-in programs and macro effects.
- * 6 DMX Channels USITT DMX-512
- * DMX512 and sound activated controllable or auto operation
- * Dual mounting brackets for ground or hanging application
- * Linkable via 3-pin XLR cables
- * -35°C to 45°C ambient temperature
- * IP20 protection rating

GBR-PL5403 54x3W LED Indoor Par Can



Specifications

- *Input Voltage: AC90-240V 50-60Hz
- *LED Qty: 54x3W RGBW LED (R14/G14/B14/W12)
- *Control Mode: DMX 512, Master/Slave, Sound and Work Auto
- *Control Channel: 6 DMX Channels
- *Power Consumption: 180W
- *Dimension: 290x220x300mm
- *Packing Size: 540x540x400mm (4pcs/CTN)
- *Net Weight: 2.4kgs
- *Gross Weight: 14.5kgs

Features

- *50,000 hours lifespan and low power consumption
- *16.7 millions of colors by mixing
- *25° Projection Beam Angle (35° /45° can be Optional)
- *Manual Controllable for TILT angle adjustment.
- *0-100% Smooth Dimmer
- *High speed strobe effect with speed adjustable
- *Different Built-in programs and macro effects.
- *6 DMX Channels USITT DMX-512
- *DMX512 and sound activated controllable or auto operation
- *Dual mounting brackets for ground or hanging application
- *Linkable via 3-pin XLR cables
- *-35°C to 45°C ambient temperature
- *IP20 protection rating

GBR-TL9641 96x10W 4in1 LED City Color



Specifications

- *Input Voltage: AC90-240V 50-60Hz
- *LED Qty: 96x10W RGBW 4in1 LED
- *Control Mode: DMX 512, Master/Slave, Sound Activated and Work Auto
- *Control Channel: 8 DMX Channels
- *Power Consumption: 1000W
- *Packing Size: 740x530x540mm (Wooden Packing)
- *Net Weight: 30kgs
- *Gross Weight: 39 kgs

Features

- *96x10W RGBW 4in1 High Power LED
- *50,000 hours life span and low power consumption
- *16.7 millions of colors by mixing
- * 45 degree high efficiency optic lens. (25° , 60° optional)
- *Manual Controllable for TILT angle adjustment.
- *LED shutter effect
- *Smooth LED dimming
- *LED rainbow effect
- *Macro effect
- *High speed strobe effect with speed adjustable
- *Different Built-in programs and macro effects.
- *DMX 512, master-slave and sound activated controllable or auto operation
- * 3-Pin DMX Waterproof connectors IN/OUT
- *-40°C ~ 45°C max ambient temperature
- *IP65 Protection rating

GBR-TL1531 150W RGB 3in1 LED City Color Light



Specifications

- *Input Voltage: AC90-240V 50-60Hz
- *LED Qty: 150x3W RGB 3in1 LED
- *Control Mode: DMX 512, Master/Slave, Sound Activated and Work Auto
- *Control Channel: 7 DMX Channels
- *Power Consumption: 500W
- *Packing Size: 740x530x540mm (Wooden Packing)
- *Net Weight: 29.5kgs
- *Gross Weight: 38 kgs

Features

- *150pc 3W RGB 3in1 High Power LED
- *50,000 hours life span and low power consumption
- *16.7 millions of colors by mixing
- *25° Beam Angle (45° /60° can be Optional)
- *Manual Controllable for TILT angle adjustment.
- *LED shutter effect
- *Smooth LED dimming
- *LED rainbow effect
- *Macro effect
- *High speed strobe effect with speed adjustable
- *Different Built-in programs and macro effects.
- *DMX 512, master-slave and sound activated controllable or auto operation
- *3-Pin DMX Waterproof connectors IN/OUT
- *-40°C ~ 45°C max ambient temperature
- *IP65 Protection rating

GBR-TL1083 108x3W LED Spot Light



Specifications

- *Input Voltage: AC90-240V 50-60Hz
- *LED Qty: 108x3W RGB LED (R36, G36, B36)
- *Control Mode: DMX 512, Master/Slave, Sound Activated and Work Auto
- *Control Channel: 7 DMX Channels
- *Power Consumption: 350W
- *Packing Size: 580x250x390mm
- *Net Weight: 14.8kg
- *Gross Weight: 18 kg

Features

- *108pc 3W RGB LED
- *50,000 hours life span and low power consumption
- *16.7 millions of colors by mixing
- *25° Beam Angle (45° /60° can be Optional)
- *Manual Controllable for TILT angle adjustment.
- *LED shutter effect
- *Smooth LED dimming
- *LED rainbow effect
- *Macro effect
- *High speed strobe effect with speed adjustable
- *Different Built-in programs and macro effects.
- *DMX 512, master-slave and sound activated controllable or auto operation
- * Die-cast Aluminum Housing
- * 3-Pin DMX Waterproof connectors IN/OUT
- *-40°C ~ 45°C max ambient temperature
- *IP65 Protection rating

GBR-FL300 300W LED Follow Spot Light



Specifications

Input Voltage: AC110-240V 50-60Hz

LED Quantities: 1x300W COB White LED

Lifespan: 50,000hours

Color: 5 Color + Open

Effect: CTO Color Adjust

Iris: 5%-100% Auto Iris

Focus: Electronic Auto Focus

Strobe: Electronic strobe

Control: Manual

Packing Size: 760x440x340mm

850x150x180mm

G.W: 17KG +5kg

Waterproof: IP20

GBR-PL300 300W LED Zoom Fresnel Light



Specifications

Input Voltage: AC110-240V 50-60Hz

LED Quantities: 1x300W COB White LED/ Warm White LED

Lifespan: 50,000hours

Power Consumption: 350W

Color Temperature and Index: 3200K @Ra \geq 93;
5600K @Ra \geq 90

Dimmer: 0%-100% Linear and classless dimming

Zoom Angle : 15-30°

Strobe: Electronic strobe

Control: DMX 512, Work Auto

Channel: 2 DMX Channel

Environment temperature: -20°C --+40°C;

Heat dissipation: No fan, natural drafting

Product Size: 210x260x440mm?

Packing Size: 555x390x370mm

N.W: 7kgs ?

G.W. 9.0kgs ?

Waterproof Rate: IP20

GBR-PL200 200W LED Studio Light



Specifications

Input Voltage: AC110-240V 50-60Hz

LED Quantities: 1x200W COB White LED/ Warm White LED

Lifespan: 50,000hours

Power Consumption: 250W

Color Temperature and Index: 3200K @Ra \geq 93;
5600K @Ra \geq 90

Dimmer: 0%-100% Linear and classless dimming

Beam Angle : 45° (19° /26° optional)

Strobe: Electronic strobe

Control: DMX 512, Work Auto

Channel: 2 DMX Channel

Housing: Aluminum Alloy & Metal

Environment temperature: -20°C --+40°C;

Heat dissipation: No fan, natural drafting

Product Size:180x180x380mm

Packing Size: 240x240x500mm

N.W: 4.2kgs

G.W: 5.0kgs

Waterproof Rate: IP20

GBR-EL200 200W LED Profile Light



Specifications

Input Voltage: AC110-240V 50-60Hz

LED Quantities: 1x200W COB White LED/ Warm White LED

Lifespan: 50,000hours

Power Consumption: 250W

Color Temperature and Index: 3200K @Ra \geq 93;
5600K @Ra \geq 90

Dimmer: 0%-100% Linear and classless dimming

Beam Angle : 19° (26° /36° optional)

Strobe: Electronic strobe

Control: DMX 512, Work Auto

Channel: 2 DMX Channel

Housing: Aluminum Alloy & Metal

Environment temperature: -20°C --+40°C;

Heat dissipation: No fan, natural drafting

Feature: Compact Design, Light Weight and cooling system using heat pipe heat dissipation

Product Size:350x350x630mm

Packing Size: 660x360x360mm

N.W: 8.7kgs

G.W: 10.5kgs

Waterproof Rate: IP20

GBR-EL750 750W Profile light



Specifications

Input Voltage: AC110V/220V, 50Hz-60Hz

Lamp: HPL750 Tungsten Bulb

Lifespan: 6000hours

Power Consumption: 850W

Color Temperature and Index: 3200K @Ra \geq 93;
5600K @Ra \geq 90

Beam Angle : 19° (26° /36° optional)

Control: Work Auto

Housing: Aluminum Alloy & Metal

Environment temperature: -20°C --+40°C;

Heat dissipation: No fan, natural drafting

Product Size:280x280x520mm

Packing Size:290x290x620mm

N.W: 5.5kgs

G.W: 6.4kgs

Waterproof Rate: IP20

GBR-SW200 200W LED Watermark light



Specifications

Input Voltage: AC110V-240V, 50/60Hz

Light Source: 200W White Color LED

Life Span: 50000 Hours

Power Consumption: 250W

CRI: >90

CTO: 7500K

Beam Angle: 30° (20° and 60° optional)

Strobe: 0.5-20/s

Color: 5 color + White

Work Mode: DMX512, Work Auto. Master/Slave

Waterpattern: 2 Water patterns, adjustable water flow speed, Water pattern can be replaced with blue sky and clouds

Dimmer: 0-100% linear Dimmer

IP Rate: IP65

Display: LCD, Chinese and English Display, Reversible display

Temperature detection: LCD screen shows operating temperature, temperature is too high, LED automatically reduces power protective light.

DMX Channel: 8 DMX Channels

Working Temperature: -35°C ~ 45°C

Product Size: 320x250x320mm

N.W: 7.8kgs

GBR-LG200 200W LED Logo Light



Specifications

Input Voltage: AC110V-240V, 50/60Hz

Light Source: 200W White Color LED

Life Span: 50000 Hours

Power Consumption: 250W

CRI: >90

CTO: 7500K

Beam Angle: 30° (20° and 60° optional)

Strobe: 0.5-20/s

Color: 5 color + White

Gobo: 4 Gobos, can 360 degree rotating.

Work Mode: DMX512, Work Auto. Master/Slave

Dimmer: 0-100% linear Dimmer

IP Rate: IP65

Display: LCD, Chinese and English Display, Reversible display

Temperature detection: LCD screen shows operating temperature, temperature is too high, LED automatically reduces power protective light.

DMX Channel: 8 DMX Channels

Working Temperature: -35°C ~ 45°C

Product Size: 320x250x320mm

N.W: 8.2kgs

GBR-HT2000/HT3000/HT4000/HT5000/HT7000



Specifications

- * Input Voltage: AC110V/220V/380V 50Hz/60Hz
- * Lamp: XQ2KW/3KW/4KW/5KW/7KW
- * Control Mode: DMX 512, Master/Slave and Work Auto
- * Control Channel: 12 DMX Channels
- * Power Consumption: 2500W/3500W/4500W/5500W/7500W
- * Dimension: 700x790x1430mm
- * Packing Size: 860x770x1600mm
- * Net Weight: 130kg
- * Gross Weight: 145kg

Features

- * High Power Xenon 2000W/3000W/400W/5000W/7000W Lamp
- * 1000 Hours Lamp Life Span
- * 360° pan and 270° tilt movement
- * Auto 5.4 Pan Fine Adjustment
- * Auto X/Y reposition Correction
- * CMY Color Changing System
- * High speed strobe effect with speed adjustable
- * Produce a single narrow searchlight beam
- * A superbly bright perfect light beam normally visible at distances of kilometres
- * Waterproof Housing Design
- * Aluminum Alloy body, Plate shell with insulated lacquer
- * 12 DMX Channels
- * Control By 3 Modes: DMX 512, Master/Slave, work auto
- * -45°C -60°C Working Temperature
- * IP54 protection rating
- * Apply for Theme parks, Fountain Plaza, Castles, Hotels, TV Station towers, Live concert, outdoor evening celebrations etc

GBR-MT2000/MT3000/MT4000/MT5000



Specifications

- * Input Voltage: AC110V/220V/380V 50Hz/60Hz
- * Lamp: XQ2KW/3KW/4KW/5KW
- * Control Mode: DMX 512, Master/Slave and Work Auto
- * Control Channel: 7 DMX Channels
- * Power Consumption: 2500W/3500W/4500W/5500W
- * Dimension: 750X580X1250mm
- * Packing Size: 870X700X1420mm

Features

- * High Power Xenon 2000W/3000W/400W/5000W Lamp
- * 1000 Hours Lamp Life Span
- * 350° pan and 270° tilt movement
- * Auto 5.4 Pan Fine Adjustment
- * Auto X/Y reposition Correction
- * Single Color (Red, Green, Blue, Yellow, White can be optional)
- * High speed strobe effect with speed adjustable
- * Produce a single narrow searchlight beam
- * A superbly bright perfect light beam normally visible at distances of kilometres
- * Waterproof Housing Design
- * Aluminum Alloy body, Plate shell with insulated lacquer
- * 7 DMX Channels
- * Control By 3 Modes: DMX 512, Master/Slave, work auto
- * -45°C-60°C Working Temperature
- * IP54 protection rating
- * Apply for Theme parks, Fountain Plaza, Castles, Hotels, TV Station towers, Live concert etc

GBR-PT6000/PT7000 Sky Search Light



Specifications

- * Input Voltage: AC110V/220V/380V 50Hz/60Hz
- * Lamp: XQ6KW/7KW
- * Control Mode: Standalone
- * Power Consumption: 6500W/7500W
- * Dimension: 860x700x1300mm
- * Packing Size: 920x760x1500mm
- * N.W: 90-105KG

Features

- * High Power Xenon 6000W/7000W Lamp
- * 1000 Hours Lamp Life Span
- * 90-110° Pan Auto Moving after Switch On
- * Max 60° Tilt Adjustment by Manual
- * Single Color (Red, Green, Blue, Yellow, White can be optional)
- * 9° Beam Angle
- * Produce a single narrow searchlight beam
- * A superbly bright perfect light beam normally visible at distances of kilometres
- * Waterproof Housing Design
- * Aluminum Alloy body, Plate shell with insulated lacquer
- * Standalone when Power On.
- * 6-8 Kilometers Project distance
- * -45°C-60°C Working Temperature
- * IP54 protection rating
- * Apply for high building, Hotels, TV Station towers ,Live concert, Theme parks, holiday villages etc

GBR-PT2000/PT3000/PT4000/PT5000 Sky Search Light



Specifications

- * Input Voltage: AC110V/220V/380V 50Hz/60Hz
- * Lamp: XQ2KW/3KW/4KW/5KW
- * Control Mode: Standalone
- * Power Consumption: 2500W/3500W/4500W/5500W
- * Dimension: 580x560x860mm
- * Packing Size: 570x470x860mm
- * N.W: 40-70 KG

Features

- * High Power Xenon 2000W/3000W/4000W/5000W Lamp
- * 1000 Hours Lamp Life Span
- * 90-110° Pan Auto Moving after Switch On
- * Max 60° Tilt Adjustment by Manual
- * Single Color (Red, Green, Blue, Yellow, White can be optional)
- * Produce a single narrow searchlight beam
- * A superbly bright perfect light beam normally visible at distances of kilometres
- * Waterproof Housing Design
- * Aluminum Alloy body, Plate shell with insulated lacquer
- * Standalone when Power On.
- * 1-5 Kilometers Project distance
- * -45°C -60°C Working Temperature
- * IP54 protection rating
- * Apply for high building, Hotels, TV Station towers, Live concert, Theme parks, holiday villages etc